


IN ACCORDANCE WITH ANSI/APSP/ICC-5 2011, THE INSTALLER IS RESPONSIBLE FOR PLACING ONE SKIMMER FOR EVERY 800 SQUARE FEET OF SURFACE AREA AND ONE RETURN FOR EVERY 300 SQUARE FEET OF SURFACE AREA.

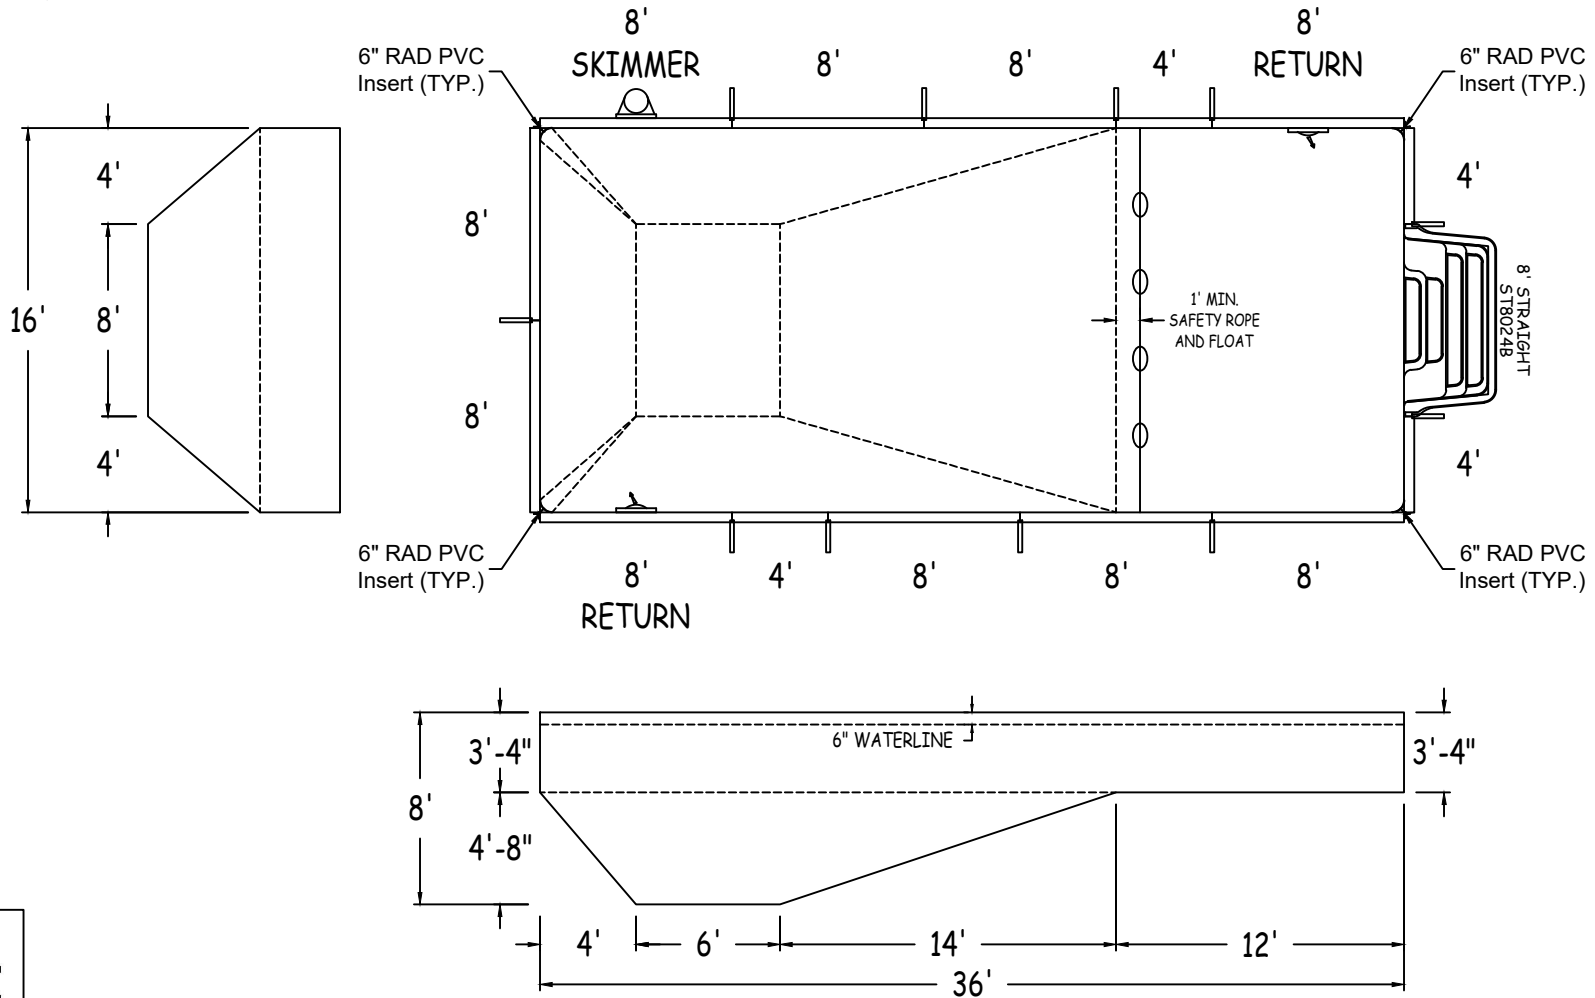

**LATHAM STEEL**

**RECTANGLE 6IN RAD 16-0 x 36-0**

42" STEEL PANELS

PERIMETER: 104'-0" VOLUME (US Gal): 18900

DWG#: 2024-SPL-04932

SURFACE (ft²): 576 VOLUME (Liters): 71500

KIT#: CUSTOMKIT

LINER (ft²): 576 DATE: 2/13/2024 DSR:

COVER (ft²): 684

SCALE: 1/8" = 1'-0"



DIVING/SLIDING EQUIPMENT SHALL BE DESIGNED FOR SWIMMING POOLS AND SHALL BE INSTALLED IN ACCORDANCE WITH THE DIVING/SLIDING EQUIPMENT MANUFACTURER'S SPECIFICATIONS. PLEASE CONTACT THE DIVING/SLIDING EQUIPMENT MANUFACTURER FOR THEIR SPECIFICATIONS.

CUSTOMER: SCP/OLIVE BRANCH

JOB NAME: 16X36/6R


ALL ASPECTS OF THIS DRAWING COMPLIES WITH ANSI/APSP/ICC-5 2011 AND 2015 ISPSC

**RECTANGLE**

SHEET: 1 OF 2

Diagonals	1 to 6	16'-0"
S1toS2	2 to 3	4'-0"
H1toH2	2 to 4	12'-0"
S1toH1	2 to 5	16'-0"
S2toH2	2 to 6	39'-4 3/4"
S1toH2	3 to 4	8'-0"
H1toS2	3 to 5	12'-0"
1 to 2	3 to 6	37'-11 1/4"
1 to 3	4 to 5	4'-0"
1 to 4	4 to 6	36'-2 3/4"
1 to 5	5 to 6	36'-0"

		Base
Part number	Description	QTY
ST0960002X	8'	7
ST0960002*	8' SKIMMER	1
ST0960002*	8' RETURN	2
ST0480001X	4'	4
Brace	Brace	11
IPC-AB90	CONNECTOR CNR ANGLE 90D 42"	4
IPC-AB90-INS6R	CORNER INSERT 6" RAD PVC 42"	4
IPC-STKPK25	REBAR STAKE 18" 25PC	2
IPC-HDWSTR150	BOLT STR 3/8-16X1" C/W NUT 150PC	2
ST8024B	THICKSHEET STEP STR SIT N STEP 8'	1

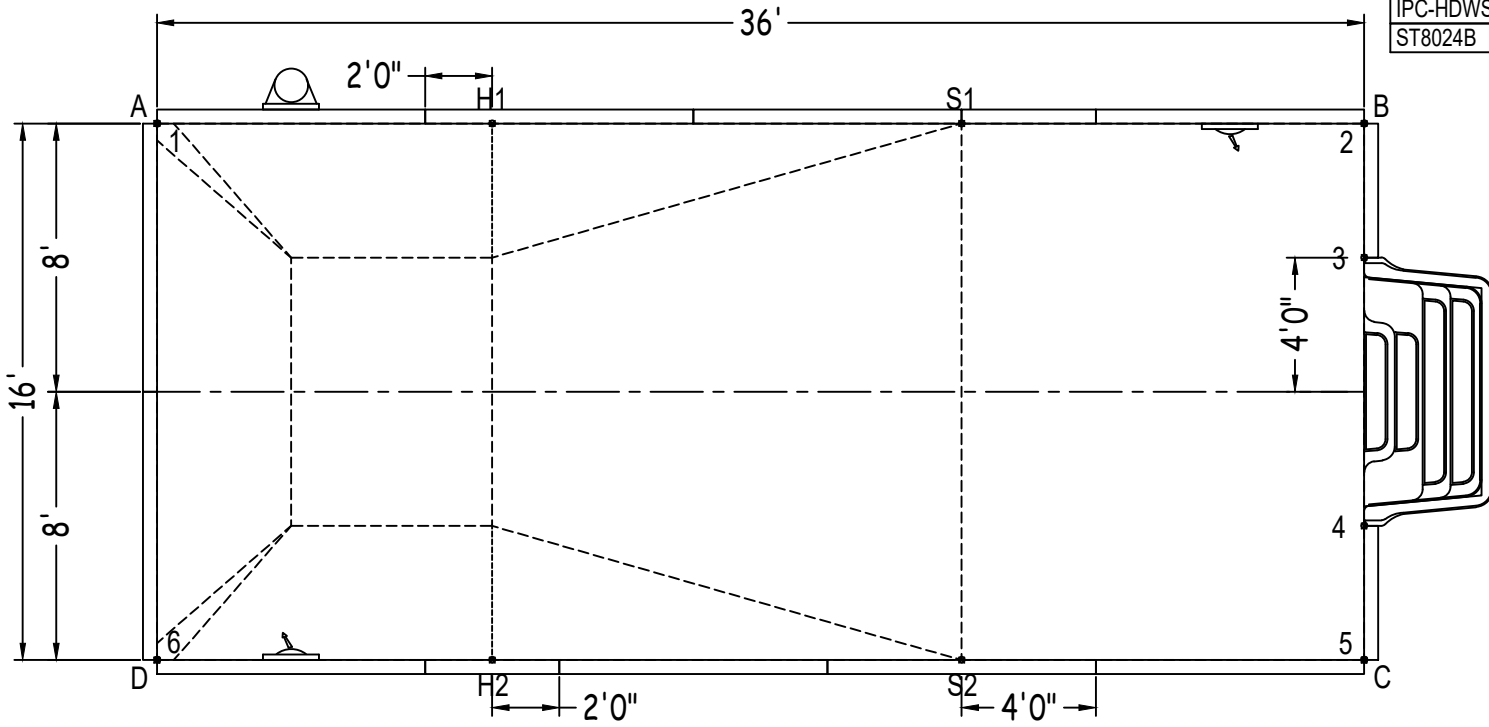

	A	B	C	D
1	0"	36'-0"	39'-4 3/4"	16'-0"
2	36'-0"	0"	16'-0"	39'-4 3/4"
3	36'-2 3/4"	4'-0"	12'-0"	37'-11 1/4"
4	37'-11 1/4"	12'-0"	4'-0"	36'-2 3/4"
5	39'-4 3/4"	16'-0"	0"	36'-0"
6	16'-0"	39'-4 3/4"	36'-0"	0"
S2	28'-10 1/4"	20'-0"	12'-0"	24'-0"
S1	24'-0"	12'-0"	20'-0"	28'-10 1/4"
H2	18'-10 1/2"	30'-6 1/4"	26'-0"	10'-0"
H1	10'-0"	26'-0"	30'-6 1/4"	18'-10 1/2"
A	-	36'-0"	39'-4 3/4"	16'-0"

RECTANGLE 6IN RAD 16-0 X 36-0

DWG #: 2024-SPL-04932

DATE: 2/13/2024

SHEET: 2 OF 2