
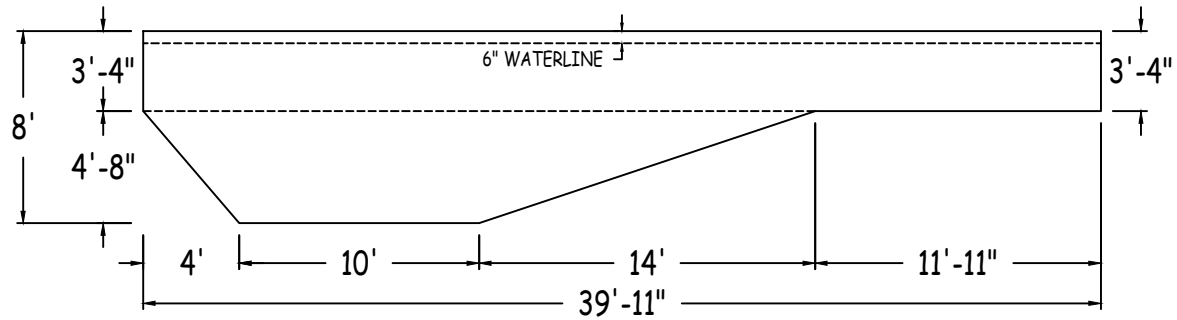
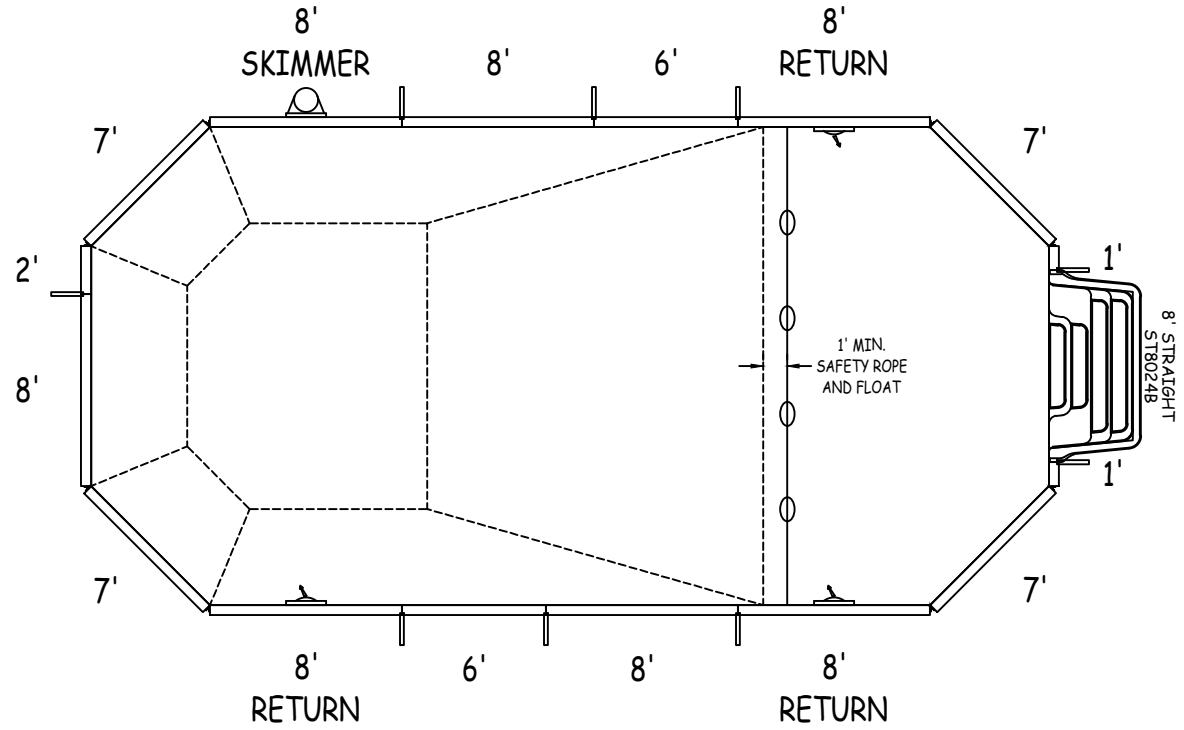


IN ACCORDANCE WITH ANSI/APSP/ICC-5 2011, THE INSTALLER IS RESPONSIBLE FOR PLACING ONE SKIMMER FOR EVERY 800 SQUARE FEET OF SURFACE AREA AND ONE RETURN FOR EVERY 300 SQUARE FEET OF SURFACE AREA.

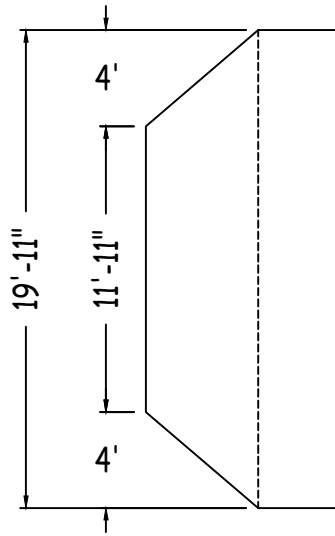

**LATHAM STEEL**

**GRECIAN 19-11 x 39-11**

42" STEEL PANELS

PERIMETER: 108'-0" VOLUME (US Gal): 24500

DWG#: 2024-SPL-08616

SURFACE (ft²): 745 VOLUME (Liters): 92700

KIT#: CUSTOMKIT

LINER (ft²): 794 DATE: 3/6/2024 DSR:

COVER (ft²): 918

SCALE: 1/8" = 1'-0"



DIVING/SLIDING EQUIPMENT SHALL BE DESIGNED FOR SWIMMING POOLS AND SHALL BE INSTALLED IN ACCORDANCE WITH THE DIVING/SLIDING EQUIPMENT MANUFACTURER'S SPECIFICATIONS. PLEASE CONTACT THE DIVING/SLIDING EQUIPMENT MANUFACTURER FOR THEIR SPECIFICATIONS.

CUSTOMER: SCP/OLIVE BRANCH


JOB NAME:

ALL ASPECTS OF THIS DRAWING COMPLIES WITH ANSI/APSP/ICC-5 2011 AND 2015 ISPSC



Diagonals	2 to 5	14'-9 3/4"	4 to 10	39'-11"
S1 to S2	2 to 6	15'-9"	5 to 6	1'-0"
H1 to H2	2 to 7	19'-11"	5 to 7	7'-9"
S1 to H1	2 to 8	36'-0"	5 to 8	35'-5 1/2"
S2 to H2	2 to 9	38'-1 1/4"	5 to 9	39'-11"
S1 to H2	2 to 10	35'-3 3/4"	5 to 10	40'-11"
H1 to S2	3 to 4	1'-0"	6 to 7	7'-0"
1 to 2	3 to 5	9'-0"	6 to 8	35'-3 3/4"
1 to 3	3 to 6	10'-0"	6 to 9	39'-11"
1 to 4	3 to 7	15'-9"	6 to 10	41'-1 3/4"
1 to 5	3 to 8	38'-1 1/4"	7 to 8	30'-0"
1 to 6	3 to 9	41'-1 3/4"	7 to 9	35'-3 3/4"
1 to 7	3 to 10	39'-11"	7 to 10	38'-1 1/4"
1 to 8	4 to 5	8'-0"	8 to 9	7'-0"
1 to 9	4 to 6	9'-0"	8 to 10	15'-9"
1 to 10	4 to 7	14'-9 3/4"	9 to 10	10'-0"
2 to 3	4 to 8	37'-7 1/2"		
2 to 4	4 to 9	40'-11"		

		Base
Part number	Description	QTY
ST0960002X	8'	3
ST0960002*	8' SKIMMER	1
ST0960002*	8' RETURN	3
ST0840002X	7'	4
ST0720001X	6'	2
ST0240000X	2'	1
ST0120000X	1'	2
Brace	Brace	9
IPC-AB45	CONNECTOR CNR ANGLE 45D 42"	8
IPC-STKPK25	REBAR STAKE 18" 25PC	2
IPC-HDWSTR150	BOLT STR 3/8-16X1" C/W NUT 150PC	1
IPC-HDW-PK45	BOLT 45DEG 3/8-16X1-1/2" 72PC	1
ST8024B	THICKSHEET STEP STR SIT N STEP 8'	1

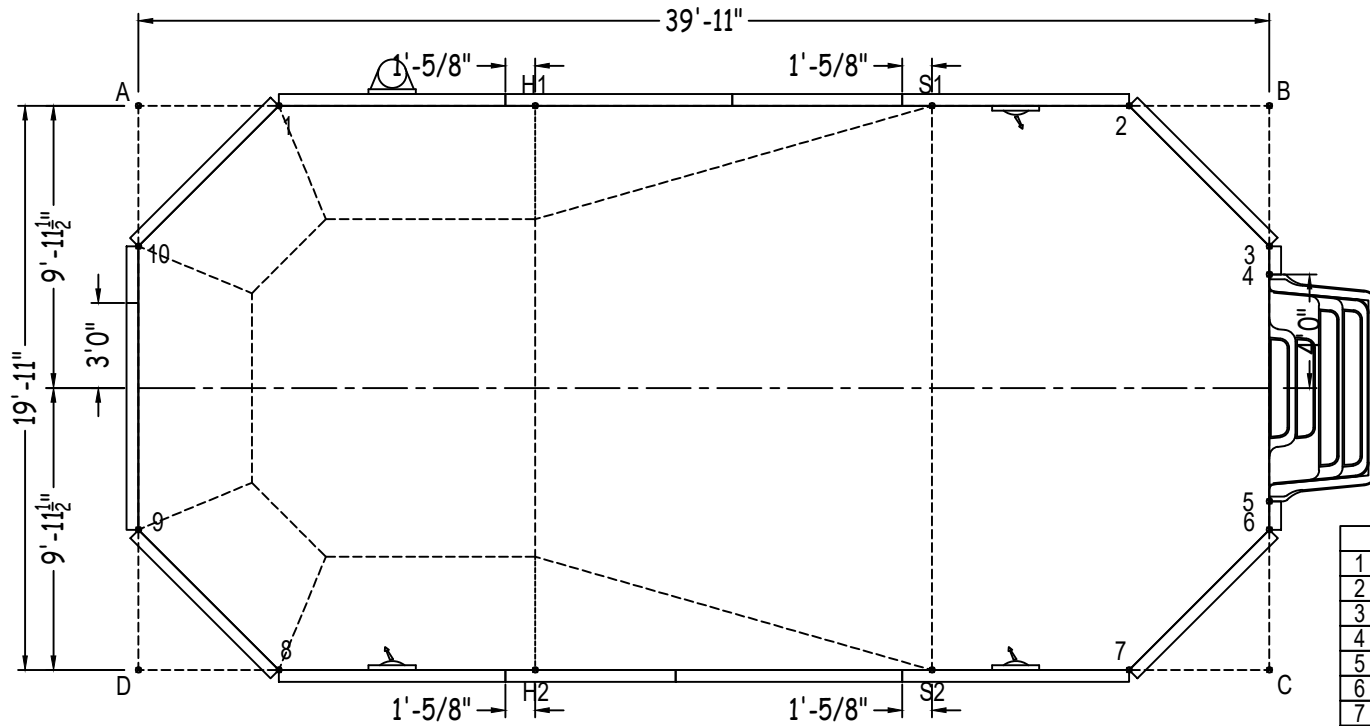

	A	B	C	D
1	4'-11 1/2"	34'-11 1/2"	40'-2 3/4"	20'-6 1/4"
2	34'-11 1/2"	4'-11 1/2"	20'-6 1/4"	40'-2 3/4"
3	40'-2 1/2"	4'-11 1/2"	14'-11 1/2"	42'-7 1/2"
4	40'-4 1/4"	5'-11 1/2"	13'-11 1/2"	42'-3 1/4"
5	42'-3 1/4"	13'-11 1/2"	5'-11 1/2"	40'-4 1/4"
6	42'-7 1/2"	14'-11 1/2"	4'-11 1/2"	40'-2 1/2"
7	40'-2 3/4"	20'-6 1/4"	4'-11 1/2"	34'-11 1/2"
8	20'-6 1/4"	40'-2 3/4"	34'-11 1/2"	4'-11 1/2"
9	14'-11 1/2"	42'-7 1/2"	40'-2 1/2"	4'-11 1/2"
10	4'-11 1/2"	40'-2 1/2"	42'-7 1/2"	14'-11 1/2"
S2	34'-4 1/4"	23'-2 1/4"	11'-11"	28'-0"
S1	28'-0"	11'-11"	23'-2 1/4"	34'-4 1/4"
H2	24'-4"	32'-8"	25'-11"	14'-0"
H1	14'-0"	25'-11"	32'-8"	24'-4"
A	-	39'-11"	44'-7 1/4"	19'-11"